



GRIP^{line} SUPER26

- Reversible rotation for hydraulic spindle.
- Hydraulic fitting carriage sliding
- Adjustable hydraulic pressure.
- 4 clamping jaws for precise gripping.
- Jaw clamp fast rotation. Manual tightening.
- Bead breaking force 26500 N

DATASHEET



Spindle tightening
inward 14" - 26"



Tire width
max 800 mm



Maximum tire diameter
1600 mm



Rotation speed
6 rpm



Weight 590 kg



Dimensions (H x D x L)
1240 x 1660 x 1830 mm



Cardboard box packaging (H x D x L)
830 x 1520 x 1900 mm



Made in Italy 

PRODUCT NUMBER / DESCRIPTION /

7000 GRIP SUPER 26
Power supply: 3-phase
400v - 50/60Hz

STANDARD ACCESSORIES




- Mounting lever 500 mm
- Long mounting lever
- Rim clamp for aluminum rims

EXTRA OPTIONS FOR TIRE CHANGERS GRIP SUPER 26



ART. 7056

- Aluminium protection jaws, set of 4, for fitting to the clamps jaws.

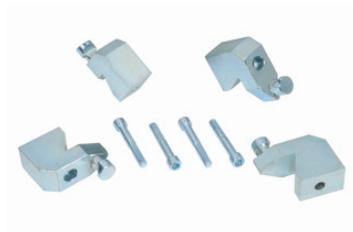

ART. 7057

- Rims adaptors kit. Central hole 80 mm



ART. 7055

- Rim clamp for aluminum rims



ART. 7050

- Inflation cage for truck tires

INFLATION CAGE FEATURES

Weight 166 kg

External dimensions (H x D x L)
1580 x 1600 x 800 mm

Internal dimensions (H x D x L)
1500 x 1500 x 700 mm

Maximum tire diameter
1500 mm

Maximum tire width
700 mm